


### P10-4S Outdoor



### Hole Position of P10

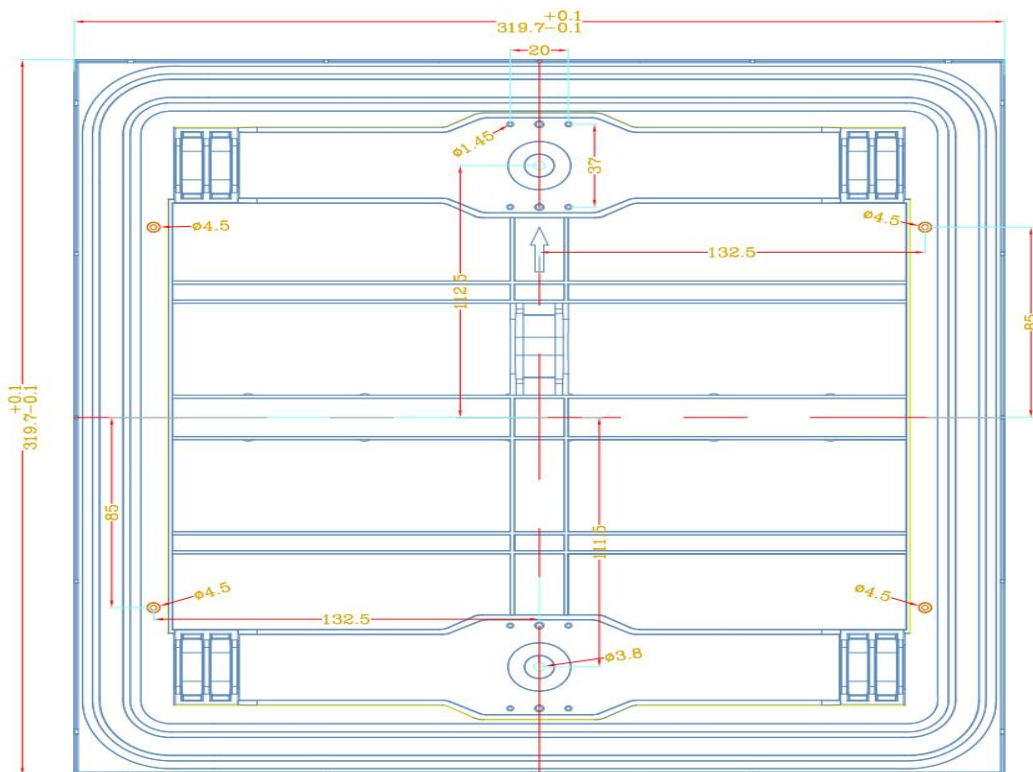

## Technical Specifications:

### Module

Pixel Pitch	10mm
LED Configuration	SMD3535
Module Size	320(W) × 320(H)
Module Resolution	32*32=1024Dots
Driving Method	Constant Current Drive 4S
Pixel Density	10000 Dots/m <sup>2</sup>
Drive Type	MBI5124GP
PCB Thickness	1.6mm
Refresh Rate	1920HZ
Brightness	4500 cd/m <sup>2</sup>
Signal Pin	HUB75
IP Rating(Front/Rear)	IP65/54
Module weight	1.267Kg
Life Span	≥ 100,000 hours

### Optical

Color Temperature	2,000K—9,300K adjustable
Viewing Angle	Horizontal 160°, vertical 160°
Brightness Uniformity	≥ 95%
Contrast Ratio	≥5000 : 1

### Processing Performance

Brightness Control	256-Grade Manual/Automatic
Frame Frequency	60 Hz
Grey Level	65,536
Processing Depth	14-16bits (RGB each)
Video Support	Full HD、Ultra HD、SHV

### Power Supply

Power Voltage	100-240 VAC±15%
Max. Consumption	600 W/m <sup>2</sup>
Average Consumption	200 W/m <sup>2</sup>

### Working Environment

Operating Temperature	-20℃~+50℃
Storage Temperature	-20℃~+55℃
Operating Humidity	10~90%RH