



P4.81-7S Outdoor

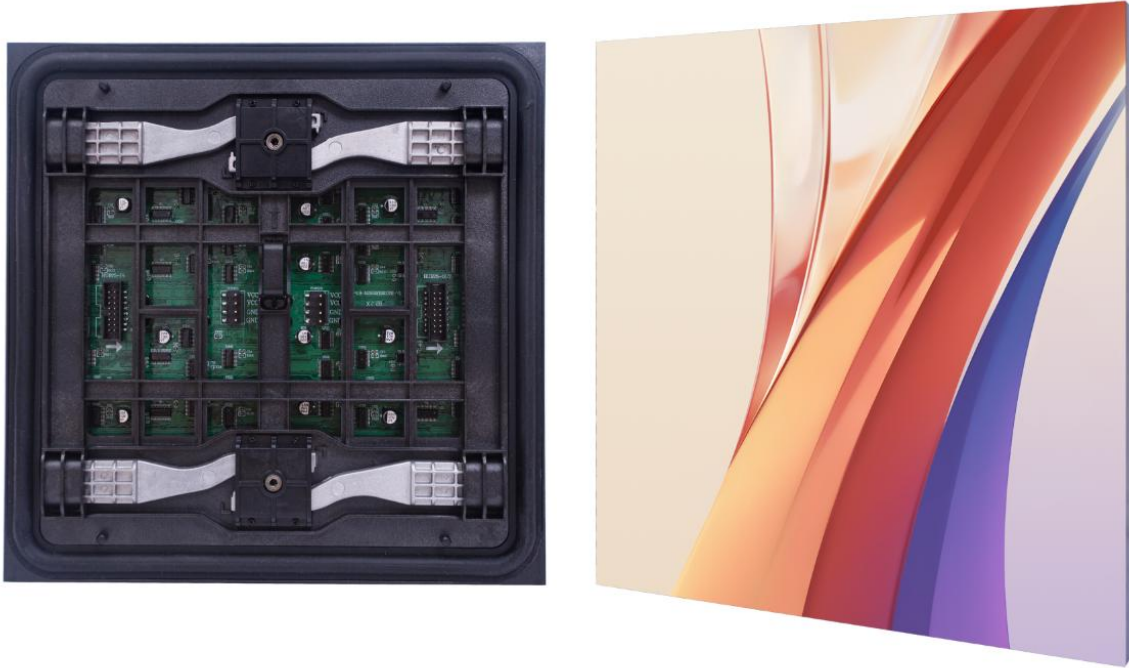

Hole Position of P4.81

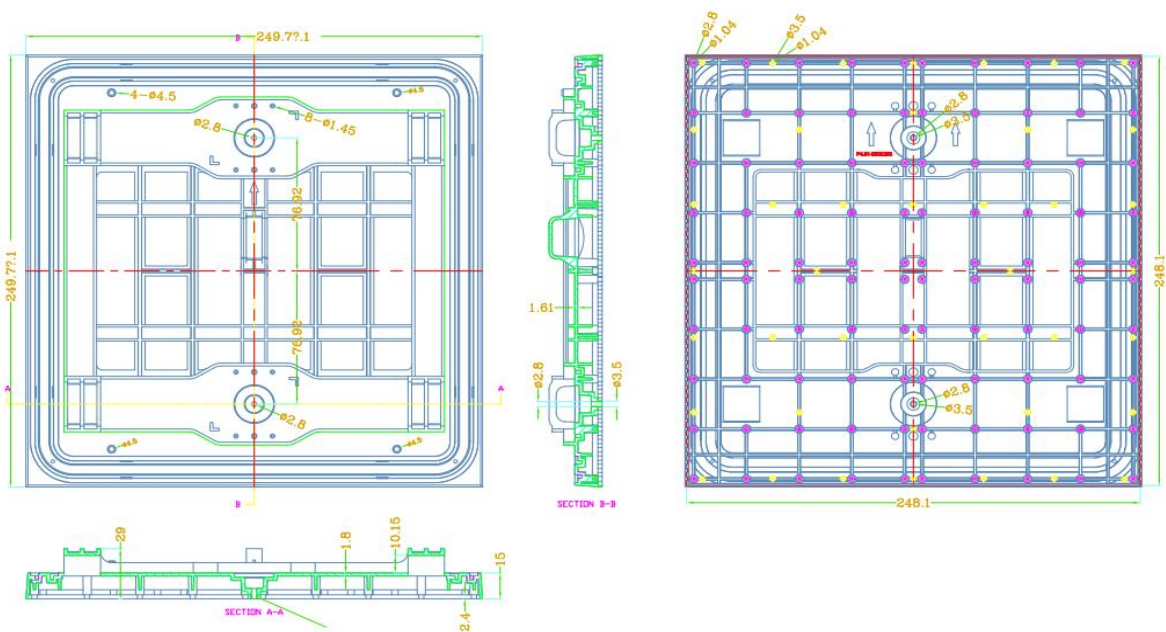

Technical Specifications:

Module

Pixel Pitch	4.81mm
LED Configuration	SMD1921
Module Size	250(W) × 250(H)
Module Resolution	52*52=2704Dots
Driving Method	Constant Current Drive 7S
Pixel Density	43264 Dots/m ²
Drive Type	ICND2153AP
PCB Thickness	1.6mm
Refresh Rate	3840HZ
Brightness	7000cd/m ²
Signal Pin	HUB75
IP Rating(Front/Rear)	IP65/54
Module weight	0.79Kg
Life Span	≥ 100,000 hours

Optical

Color Temperature	2,000K—9,300K adjustable
Viewing Angle	Horizontal 160°, vertical 160°
Brightness Uniformity	≥ 95%
Contrast Ratio	≥5000 : 1

Processing Performance

Brightness Control	256-Grade Manual/Automatic
Frame Frequency	60 Hz
Grey Level	65,536
Processing Depth	14-16bits (RGB each)
Video Support	Full HD、Ultra HD、SHV

Power Supply

Power Voltage	100-240 VAC±15%
Max. Consumption	1200 W/m ²
Average Consumption	360 W/m ²

Working Environment

Operating Temperature	-20℃~+50℃
Storage Temperature	-20℃~+55℃
Operating Humidity	10~90%RH